


RELAY MODULE TYPE I7125-8R

The bus-compatible relay module I7125-8R contains 8 independent potential-free relay outputs for controlling flashing lights, horns, fans, etc. In combination with the INOSENT product line Ultimate or Compact Pro the required number of relay outputs can be provided:

- 8 relay outputs 3A 250 VAC or 24 VDC
- 24 VDC supply voltage
- RS485 Modbus RTU-Interface
- DIN rail mounting

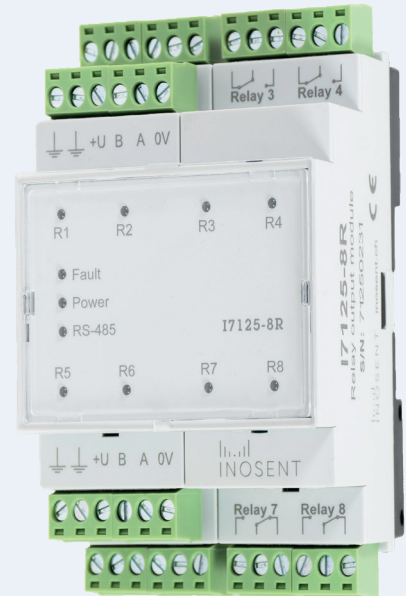

RELAY OUTPUT MODULE (SPECIFICATIONS)

SUPPLY VOLTAGE: 24 VDC

POWER CONSUMPTION : <6 VA

WIRING: 2x2x0,75 mm², shielded

NUMBER OF OUTPUTS: 8

OUTPUT TYPE : Electromagnetic relay, 3A 250 VAC or 24 VDC

PROTECTION CLASS: IP 20

OPERATING CONDITIONS: -10...+55 °C, < 80 % RH

WEIGHT: 400 gr

CERTIFICATIONS: CE

DIMENSIONS AND CONNECTIONS

