



LABORATORY

INOSENT the brand for
reliable gas detection systems.

INOSENT
GASWARNTÉCHNIK AG

Eichwatt 5 | CH - 8105 Regensdorf / Switzerland
Telephone: +41 (0)44 556 83 00 | Fax: +41 (0)44 556 83 01
info@inosent.ch | www.inosent.ch

FIRMA

WE ARE INOSENT

Our products are defined by creativity along with constant development. Our goal is to always deliver our customers the best solution while striving to create an excellent enduring working relationship. Trust, fairness and dependability are our highest priorities. At Inosent, we are firmly convinced that the best solutions can only be found through loyal, courteous consultation and collaboration. At the same time, we are always open to new ideas and we enjoy exciting challenges. INOSENT is authentic, fair – and always there for you.

OUR CUSTOMERS ARE IMPORTANT TO US

Our constant enthusiasm for our work is also the result of our belief in the value of genuine cooperation with our customers. We will give you honest advice that makes it possible for you to profit from our knowledge of the latest technical possibilities. Because, at the end of the day, even a technical field like gas detection technology is about human beings who are working with each other and for each other. And because of that, the honest relationship to our customers and the serious interaction with our customers is the most important thing for Inosent. INOSENT has time for you – and is always there for you.

WE LIKE TO FIND NEW PATHS

The world is in constant change – and, in technical fields above all, it is important to meet new possibilities with enthusiasm and creativity. When safety is the primary objective, the continual development of systems and solutions work in tandem with this goal. That is why we, at Inosent, keep our enthusiasm for innovation, and work both creatively and carefully on new solutions that can better satisfy our customers' requirements. INOSENT has time for you – and is always there for you.

AREAS OF APPLICATION

INOSENT the brand for reliable gas detection systems.

In the workplace, gas detection systems are an indispensable safety asset across a spectrum of industrial processes. Consider the routine daily use of gases in heating and refrigeration equipment in addition to the dangerous gaseous produced from processes such as, fermentation, incineration, engine combustion to name but a few. These gases can be explosive or toxic as

well as colourless, odourless and tasteless. Gases and their presence in ambient air must therefore, be accurately and professionally monitored continuously on a 24-hour basis.

INOSENT offers you intelligent, comprehensive solutions within a wide scope of industrial applications. We will support you with constructive and competent advice so that you can plan for the highest levels of safety.

COOLING SYSTEMS



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

(H)FKW | HFO | C₃H₈ | CO₂ | NH₃

WE RECOMMEND:

- INOSENT EASY
- INOSENT ULTIMATE
- INOSENT COMPACT

UNDERGROUND CAR PARK



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

CARBON MONOXIDE CO
NITROGEN DIOXIDE NO₂

WE RECOMMEND:

- INOSENT COMPACT
- INOSENT ULTIMATE

GAS HEATING



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

METHANE CH₄ | PROPANE C₃H₈

WE RECOMMEND:

- INOSENT CLASSIC

LABORATORY



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

O₂ | CO | H₂ | CO₂ | NH₃ | C₃H₈
O₃ | SiH₄ | PH₃ | ECT.

WE RECOMMEND:

- INOSENT ULTIMATE

INDUSTRY ATEX ZONE 1 & 2 SIL 1 & SIL 2



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

NH₃ | SOLVENTS | C₃H₈
CH₄ | H₂ | ECT.

WE RECOMMEND:

- INOSENT PREMIUM
- INOSENT ULTIMATE

PRODUCT LINES



E A S Y



A simple, very high-quality, stand-alone compact solution for small systems:

24 VDC/AC or 230 VAC | LED status display | 85 dB-Alarm Horn
2 Relay outputs | 4-20mA, 0-10VDC, Modbus RTU | IP 65 Protected



C O M P A C T



The ideal solution for monitoring CO and NO₂ as well as humidity in underground garages:

24 VDC | 32 BUS-Inputs for gas detectors and alarm lights | 4 digital signal inputs | LCD-Display | 8 relays outputs | Modbus RTU | WIFI interface



C L A S S I C



Efficient gas monitoring monitor in a wall-mounted housing for 2, 4 or 6 gas detectors:

24 V DC/AC or 230 VAC | 2, 4 or 6 × 4-20mA-Input | LCD-Display
4 Relay outputs | IP 65 Protected | incorporated data logger



U L T I M A T E



A versatile, intelligent gas detection system with an innovative visual display of parameters on a touch screen:

24 VDC | 90 Inputs for gas detectors, alarm lights and accessories | 7" Touch-Display | USB/ RJ45-Connection | 8 Relay outputs, expandable
Modbus RTU/TCP outputs, optional 0-10VDC or 4-20mA



P R E M I U M



A powerful, multi-functional gas detection system specially designed for SIL1 or SIL2 systems:

24 VDC | 256 Inputs for gas detectors (BUS or 4-20mA)
LCD-Display | 8 Relay outputs, expandable | 19"-Rack or metal box
incorporated data logger



P O R T A B L E




Blackline Safety: Wide range of gas sensors and accessories.
Alarm forwarding with location information by e-mail and SMS.

Riken Keiki: Mobile single-gas and multi-gas devices, extremely robust, smallest and lightest five-gas meter in the world.

LABORATORY

Toxic, inert and explosive gases are frequently used in laboratories. The need to mitigate the risk of a gas leak and for the protection of personnel and equipment necessitates the use of fixed gas detection within the laboratory environment.



INOSENT RECOMMENDS THE «**ULTIMATE**» PRODUCT LINE FOR LABORATORY GAS DETECTION.


With the «**ULTIMATE**», gas leaks can be detected at an early stage and dangerous concentrations of gas prevented: In addition to optical and acoustical alarms, the gas flow will be shut off, utilising a solenoid valve. Visual presentation of the gas detectors, measured gas values and alarm status are presented on the Ultimate touch screen, achieving an excellent overview over the events and measurement data. Logging of the gas concentrations, alarms and malfunctions, as well as a web server and a MODBUS output for communication with the building control system, are all integrated into the system.

The gas detectors can also be used without a gas monitor. As an option, the BUS- detectors are available in a neutral white plastic housing; allowing for a visually acceptable device within the laboratory space. For fast checking of gas monitoring data, suitable displays can be set up at the entrance to the laboratory.

EASY TO INTEGRATE, WITH AN IDEAL DESIGN FOR LABORATORIES:
THE «**ULTIMATE**» PRODUCT LINE



- RELIABLE MONITORING OF VARIOUS GASES, SUCH AS CARBON MONOXIDE CARBON DIOXIDE, HYDROGEN SULPHIDE, PROPANE, AMMONIA, PROPANE, AND MANY MORE.
- ULTIMATE CONTROL PANEL
- GAS DETECTORS FOR MONITORING O₂, CO, H₂, CO₂, NH₃, C₃H₈, O₃, SIH₄, PH₃, H₂S; OTHERS CAN BE CONNECTED
- LED-LIGHT WITH INTEGRATED ALARM HORN
- FLASHING LIGHT
- ALARM HORN

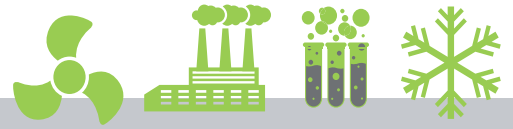

INOSENT ULTIMATE WITHOUT DIGITAL ALARM UNITS

SIGNAL:


MODBUS

MAX. QUANTITY GAS DETECTORS:

90



- SUPPLY TO ALARM UNITS
24 VDC or 230 VAC
- SUPPLY TO GAS DETECTORS:
INOSENT MODBUS-CABLE LI HCH:
Cable 2 x 2 x 0,75 mm², shielded, coloured,
max. 1200 m
- ETHERNET-CONNECTION:
8-pin RJ45, 10/100 Mbps, Auto MDI/MDIX,
Auto-Negation

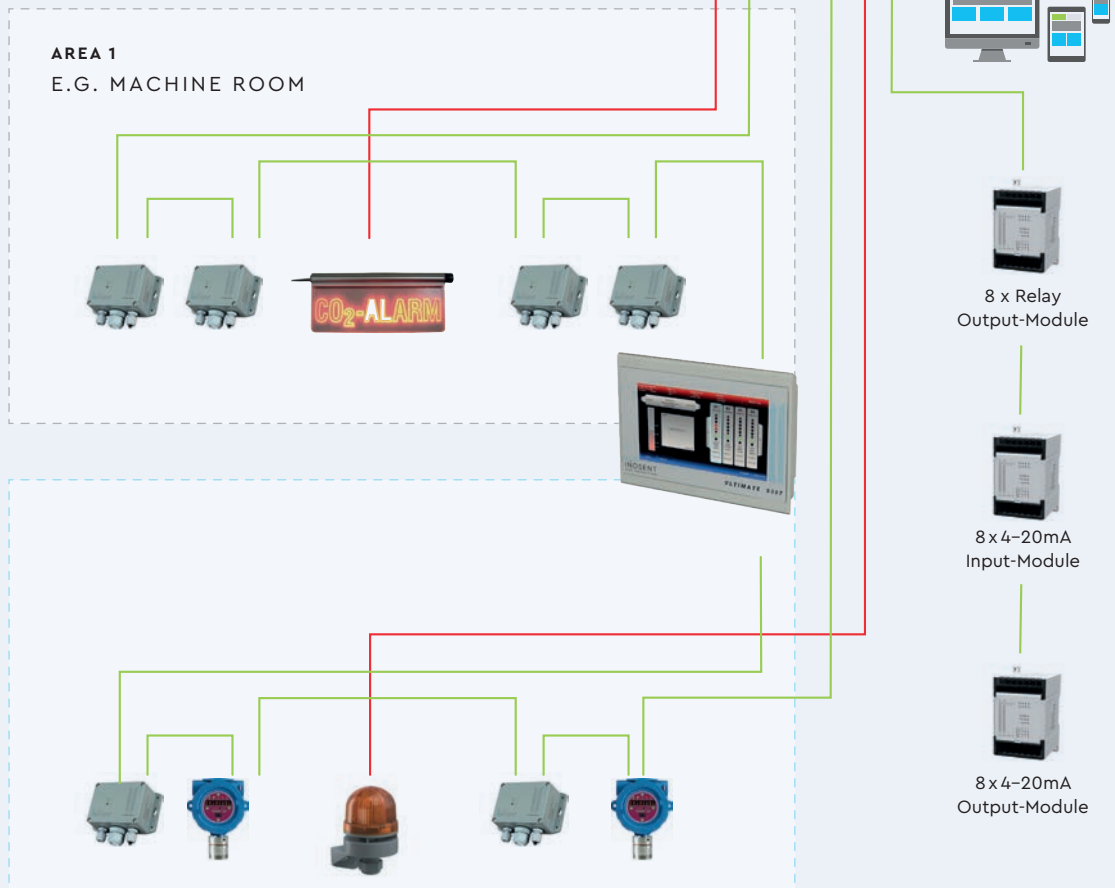



INOSENT ULTIMATE WITH DIGITAL ALARM UNITS

SIGNAL:

MODBUS

MAX. QUANTITY GAS DETECTORS:

90



SUPPLY TO GAS DETECTORS AND ALARM UNITS:

INOSENT MODBUS-CABLE LI HCH:

Cable 2 x 2 x 0,75 mm², shielded, colored,
max. 1200 m

ETHERNET-CONNECTION:

8-pin RJ45, 10/100 Mbps, Auto MDI/MDIX,
Auto-Negation



AREA 1

E.G. MACHINE ROOM



AREA 2

E.G. REFRIGERATION PLANT





ULTIMATE 5307

The Ultimate product line has been designed specifically for monitoring the concentration of gases. The gas monitor has an integrated 7-inch touch screen for the graphical display, for operation and for programming. In addition, logging of gas concentration levels, alarms and malfunctions, as well as a web server and a MODBUS RTU output for communication with the building control system, are all integrated into the Ultimate system.



OVERVIEW:

- 2 YEARS WARRANTY
- PRACTICAL BUILT-IN INSTALLATION
- 7-INCH TOUCH-SCREEN DISPLAY
- ADDITIONAL TOUCH DISPLAYS CAN BE CONNECTED ON THE SAME BUS
- SIMPLE PROGRAMMING DIRECTLY ON THE TOUCH-SCREEN
- UP TO 50 BUS COMPONENTS
- EMBEDDED WEB SERVER
- INTEGRATED LOGGING OF GAS CONCENTRATIONS, ALARMS AND MALFUNCTIONS
- DISPLAY OF MEASURING RANGES, ALARM LEVELS AND ALARM GROUPS
- MAK VALUE MODE FOR NATIONAL DIRECTIVE-COMPLIANT LABORATORY MONITORINGS


TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE: 24 VDC | Status display for operation and malfunctions on a well-organised colour display | USB- and SD-Card-interface | RJ-45 connector for the web viewer |

DIGITAL SIGNAL INPUT: 90 x digital via RS485 BUS-ports | 8 external relay contacts on the expansion module | 8 x 4-20mA analogue signal inputs on the expansion module |

AVAILABLE ACCESSORIES: Modbus-enabled LED alarm light with integrated horn, Expansion modules for additional relay outputs or analogue inputs


DIMENSIONS AND CONNECTIONS

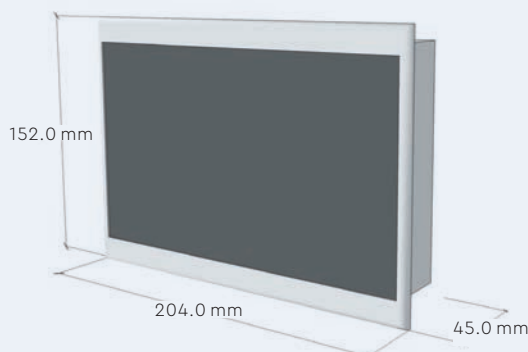

RELAY OUTPUT MODULE TYPE I7110-8R

The Modbus I7110-8R relay output module controls eight independent electromagnetic relays according to incoming digital data:

- 8 output relays 4A 250 VAC OR 24 VDC
- Universal 230 VAC / 24 VDC power supply
- RS485 Modbus RTU-Interface
- DIN-rail or wall mount

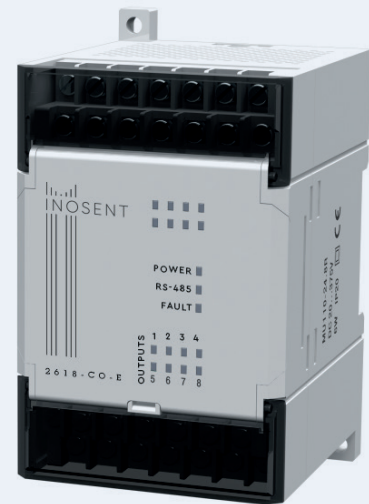

RELAY OUTPUT MODULE (SPECIFICATIONS)

SUPPLY VOLTAGE: 90...264 VAC/ 20...375 VDC

POWER CONSUMPTION : <6 VA

WIRING: 2×2×0,75 mm², shielded

NUMBER OF OUTPUTS: 8

OUTPUT TYPE : Electromagnetic relay, 4A 250 VAC or 24 VDC



PROTECTION CLASS: IP 20

OPERATING CONDITIONS: -10...+55 °C, < 80 % RH

WEIGHT: 400 gr

CERTIFICATIONS: CE

DIMENSIONS AND CONNECTIONS

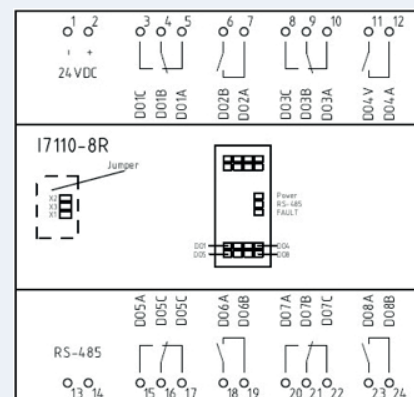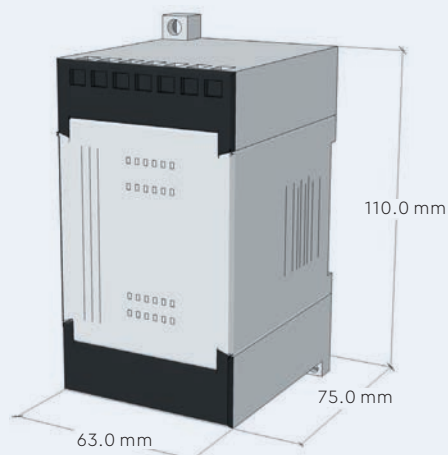

OVERVIEW OF AVAILABLE GAS DETECTORS PRODUCT LINE «EASY»

I2608-NH ₃ -E	NH ₃	Ammonia	0-100/300/1000 PPM
I2608-NH ₃ -S	NH ₃	Ammonia	0-1000 PPM
I2608-C ₂ H ₂ -S	C ₂ H ₂	Acetylen	0-100 % UEG
I2608-C ₄ H ₁₀ -S	C ₄ H ₁₀	Butane	0-100 % UEG
I2608-CO ₂ -I	CO ₂	Carbon dioxide	0-5000/10'000/50'000 PPM
I2608-CO-E	CO	Carbon monoxide	0-300 PPM
I2608-Cl ₂ -E	Cl ₂	Chlorine	0-20 PPM
I2608-C ₂ H ₄ -E	C ₂ H ₄	Ethylen	0-10/200/1500 PPM
I2608-C ₂ H ₄ -S	C ₂ H ₄	Ethylene	0-100 % UEG
I2608-ETO-E	ETO	Ethylene oxyde	0-20/100 PPM
I2608-HFC-S	HFC	Freon	0-1000 PPM
I2608-H ₂ -S	H ₂	Hydrogen	0-100 % UEG
I2608-H ₂ S-E	H ₂ S	Hydrogen sulfide	0-50/100/1000 PPM
I2608-CH ₄ -S	CH ₄	Methane	0-100 % UEG
I2608-CH ₄ -P	CH ₄	Methane	0-100 % UEG
I2608-NO-E	NO	Nitric oxide	0-30 PPM
I2608-NO ₂ -E	NO ₂	Nitrogen dioxide	0-20 PPM
I2608-O ₂ -E	O ₂	Oxygen	0-25 VOL. %
I2608-O ₃ -E	O ₃	Ozone	0-5 PPM
I2608-C ₃ H ₈ -S	C ₃ H ₈	Propane	0-100 % UEG
I2608-C ₃ H ₈ -P	C ₃ H ₈	Propane	0-100 % UEG
I2608-SO ₂ -E	SO ₂	Sulfur dioxide	0-50/100 PPM
I2608-VOC-S	VOC	VOC	0-100 % UEG

IP65



PROPANE-DETECTOR I2608-C3H8-S

The Gas detector is designed for the detection of Propan C₃H₈ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „standalone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3×0,75 mm², shielded, 2×2×0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...100 % LEL | **ACCURACY:** +/- 3 % of measuring range | **RESPONSE TIME:** t₉₀: < 15 sec | **OPERATION TEMPERATURE:** -40 °C ...+70 °C
HUMIDITY: 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1 % Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

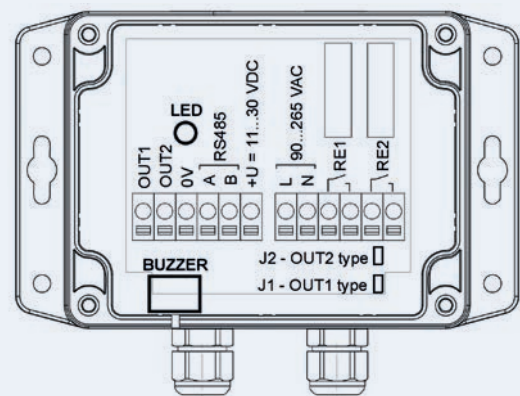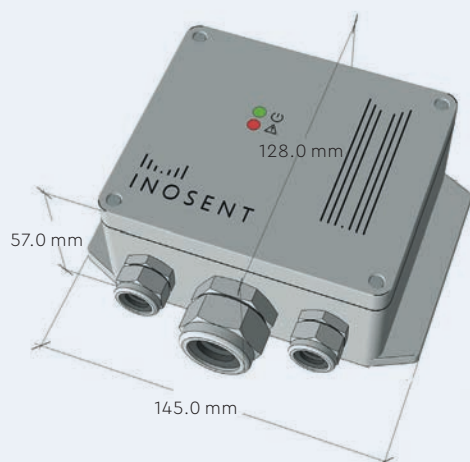

IP65



CARBON DIOXIDE-DETECTOR I2608-CO2-I

The Gas detector is designed for the detection of Carbon Dioxide CO₂ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Infrared | **MEASURING RANGE:** 0...40'000 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 60: < 60 sec | **OPERATION TEMPERATURE:** -40 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month | **APPROX. LIFETIME AT 20°C:** > 10 years, depending on application
CALIBRATION: It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

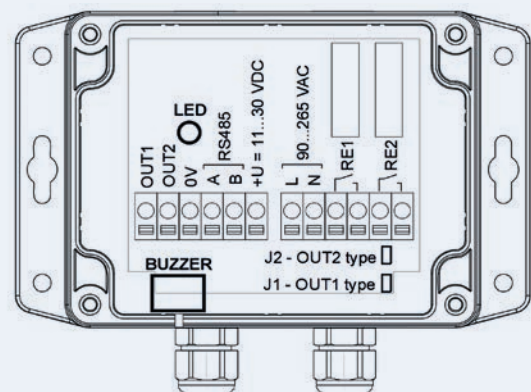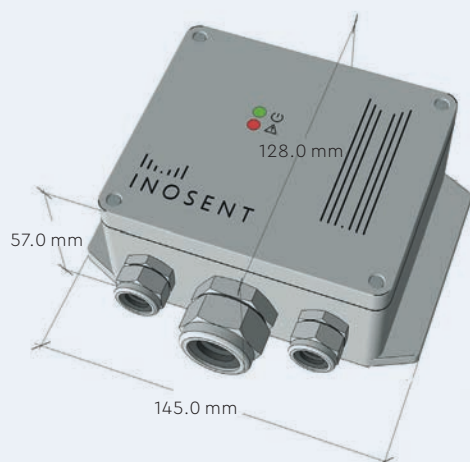

IP65



AMMONIA-DETECTOR I2608-NH3-E

The Gas detector is designed for the detection of Ammonia NH₃ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Electrochemical | **MEASURING RANGE:** 0...100/300/1'000 ppm
ACCURACY: +/- 2 % of measuring range | **RESPONSE TIME:** t 90: < 30 sec | **OPERATION TEMPERATURE:** -40 °C ...+50 °C | **HUMIDITY:** 15...90 % (non condensing) | **SIGNAL DRIFT:** < 2 % Signal/Month
APPROX. LIFETIME AT 20°C: > 2 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

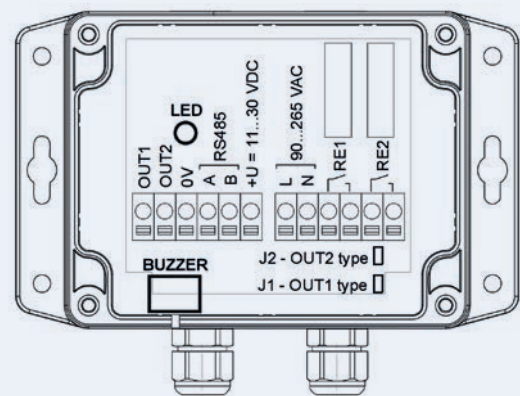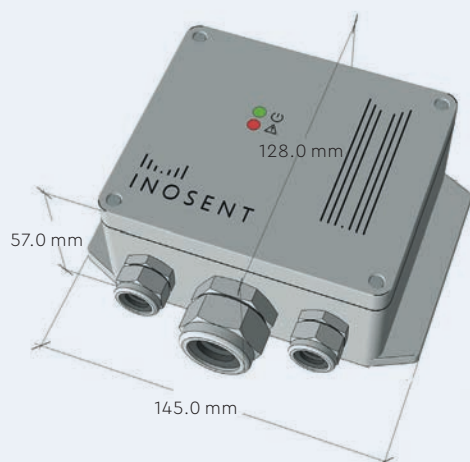

IP65



CARBON MONOXIDE-DETECTOR I2608-CO-E

The Gas detector is designed for the detection of Carbon Monoxide CO and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Electrochemical | **MEASURING RANGE:** 0...300/1'000 ppm
ACCURACY: +/- 1 % of measuring range | **RESPONSE TIME:** t₉₀ < 60 sec | **OPERATION TEMPERATURE:** -20 °C ...+50 °C | **HUMIDITY:** 0...90 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month | **APPROX. LIFETIME AT 20°C:** > 10 years, depending on application
CALIBRATION: It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

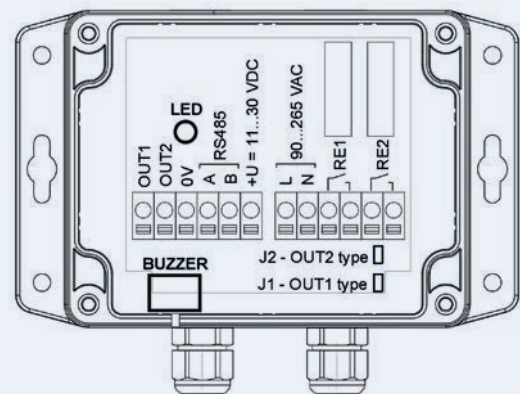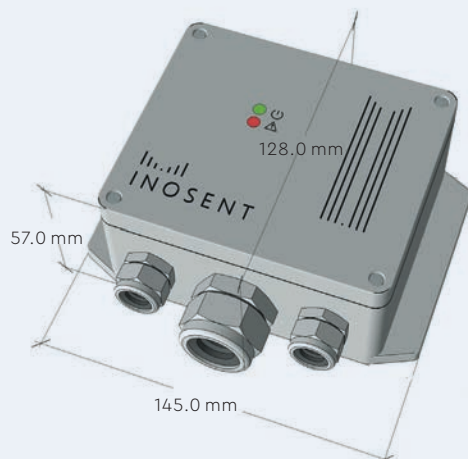

IP65



METHANE-DETECTOR I2608-CH4-S

The Gas detector is designed for the detection of Methane CH₄ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3×0,75 mm², shielded, 2×2×0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...100 % LEL | **ACCURACY:** +/- 3 % of measuring range | **RESPONSE TIME:** t₉₀: < 15 sec | **OPERATION TEMPERATURE:** -40 °C ...+70 °C
HUMIDITY: 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1 % Signal/Month
APPROX. LIFETIME: > 10 years, depending on applicaton | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

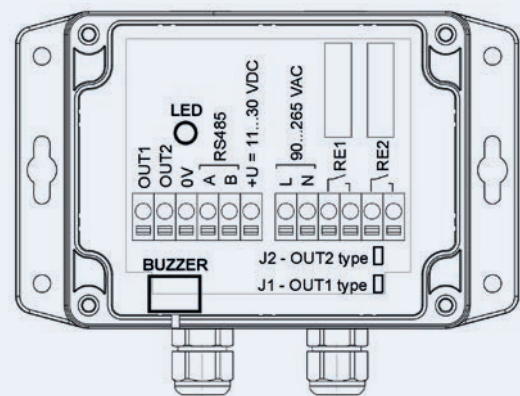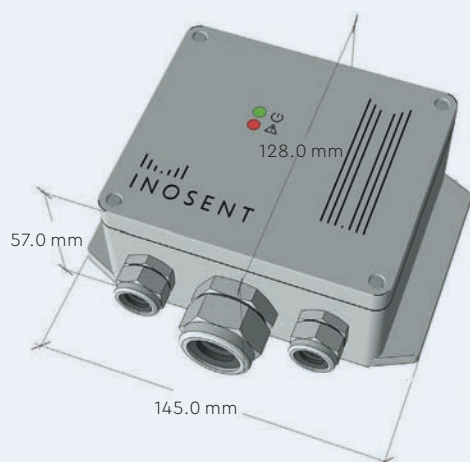

IP65



HYDROGEN-DETECTOR I2608-H2-E

The Gas detector is designed for the detection of Hydrogen H₂ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „standalone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: electrochemical | **MEASURING RANGE:** 0...4'000 ppm / 0...100% LEL
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t₉₀ < 15 sec | **OPERATION TEMPERATURE:** -30 °C ... +75 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month | **APPROX. LIFETIME AT 20°C:** > 10 years, depending on application
CALIBRATION: It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

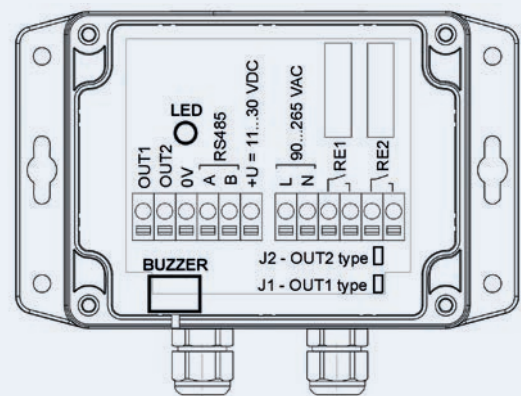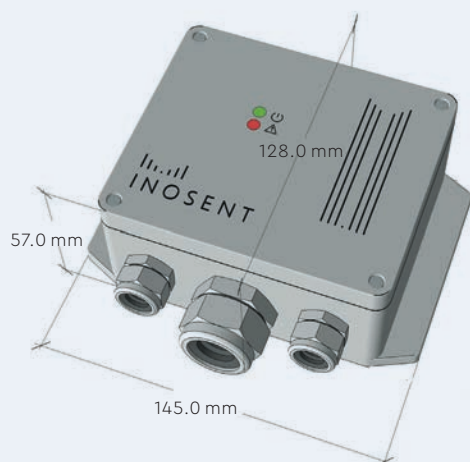

IP65



METHANE-DETECTOR I2608-CH4-S

The Gas detector is designed for the detection of Methane CH₄ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3×0,75 mm², shielded, 2×2×0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...100 % LEL | **ACCURACY:** +/- 3 % of measuring range | **RESPONSE TIME:** t₉₀: < 15 sec | **OPERATION TEMPERATURE:** -40 °C ...+70 °C
HUMIDITY: 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month
APPROX. LIFETIME: > 10 years, depending on applicaton | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

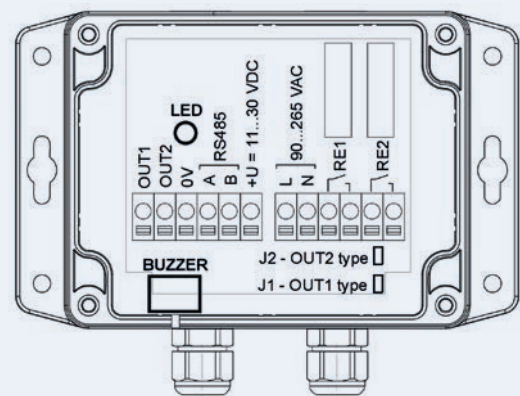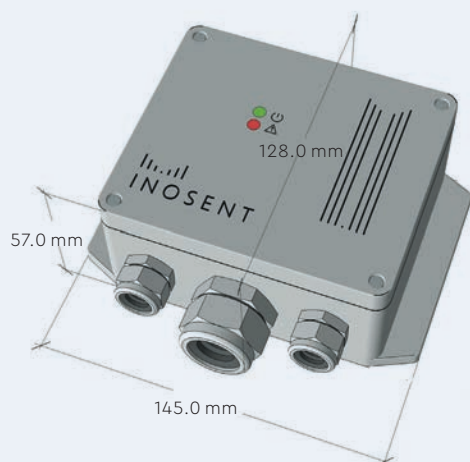

IP65



OZONE-DETECTOR I2608-O3-E

The Gas detector is designed for the detection of Ozone O₃ and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „standalone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Electrochemical | **MEASURING RANGE:** 0...5 ppm
ACCURACY: +/- 2 % of measuring range | **RESPONSE TIME:** t₉₀: < 60 sec | **OPERATION TEMPERATURE:** -40 °C ...+50 °C | **HUMIDITY:** 15...90 % (non condensing) | **SIGNAL DRIFT:** < 2 % Signal/Month
APPROX. LIFETIME AT 20°C: > 2 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

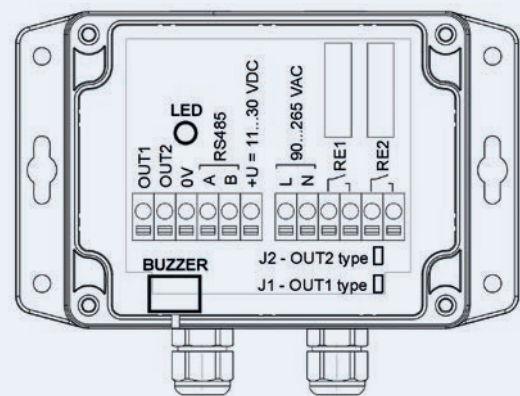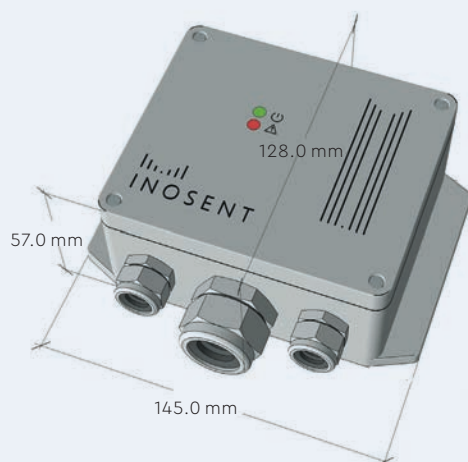

IP65



HYDROGEN SULPHIDE-DETECTOR I2608-H2S-E

The Gas detector is designed for the detection of Hydrogen Sulphide H₂S and provides 2 internal relay outputs for ventilation control and alarm, a 85 dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24 VDC or 230 VAC and can also be operated „stand-alone“ without any gas monitor. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. Optionally the Gas detector is also available with an remote sensor, integrated display or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3×0,75 mm², shielded, 2×2×0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Electrochemical | **MEASURING RANGE:** 0...100/2'000 ppm
ACCURACY: +/- 2 % of measuring range | **RESPONSE TIME:** t₉₀: < 30 sec | **OPERATION TEMPERATURE:** -30 °C ...+50 °C | **HUMIDITY:** 15...90 % (non condensing) | **SIGNAL DRIFT:** < 2 % Signal/Month
APPROX. LIFETIME AT 20°C: > 2 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

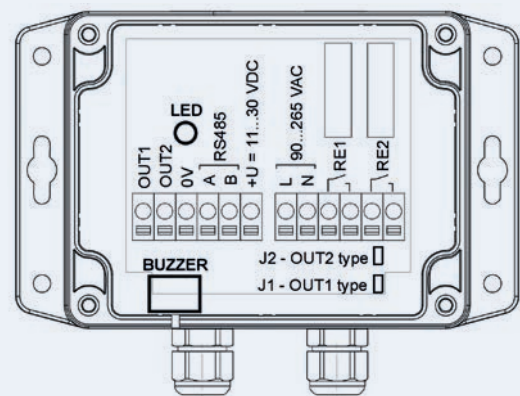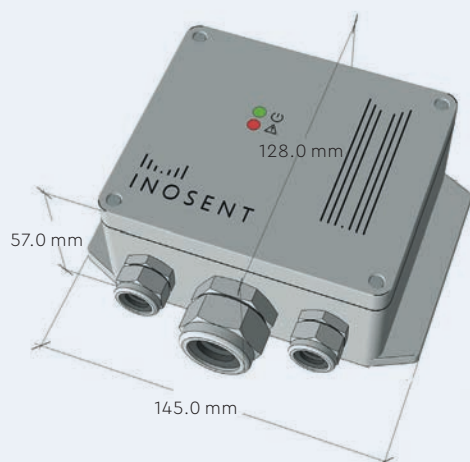

IP65



REFRIGERANT-DETECTOR I2608-HFC-S

The Gas detector is designed for the detection of (H)FKW's (R134a, R404a, R407c, etc) and provides 2 internal relay outputs for ventilation control and alarm, a 85dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also „standalone“, without any gas monitor. The Gas detector is also available with an incorporated display, a remote sensor probe, as a duct-mount version or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3×0,75 mm², shielded, 2×2×0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...1'000/2'500 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 90: < 15 sec | **OPERATION TEMPERATURE:** -30 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

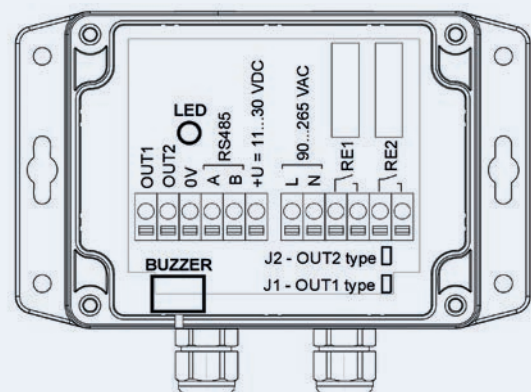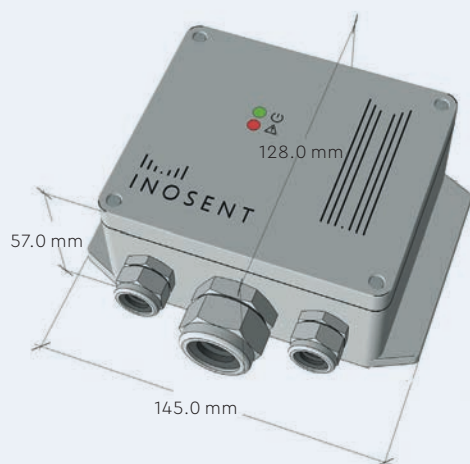

IP65



REFRIGERANT-DETECTOR I2608-HFC-S-LCD

The Gas detector is designed for the detection of (H)FKW's (R134a, R404a, etc) and provides 2 internal relay outputs for ventilation control and alarm, a 85dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue and digital output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also „standalone“, without any gas monitor. The Gas detector is also available with an remote sensor or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...1'000/2'500 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 90: < 15 sec | **OPERATION TEMPERATURE:** 0 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1 % Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

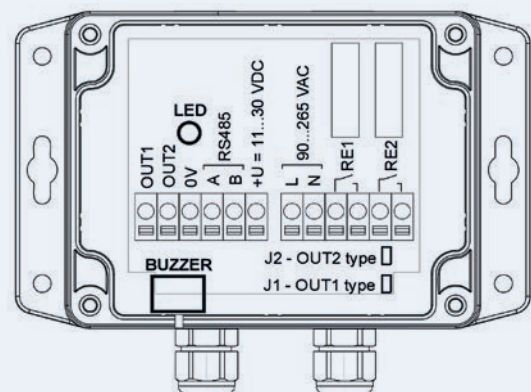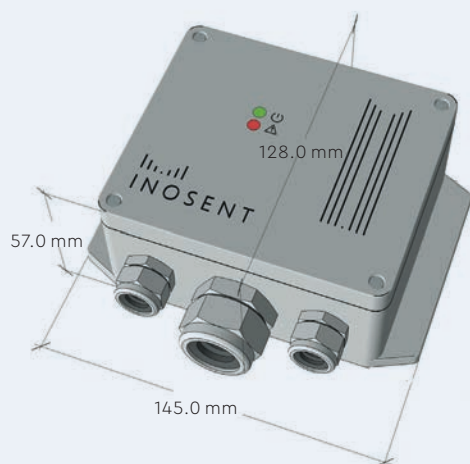

IP65



REFRIGERANT-DETECTOR I2608-HFC-S-RP33

The Gas detector is designed for the detection of (H)FKW's (R134a, R404a, etc) and provides 2 internal relay outputs for ventilation control and alarm, a 85dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue and digital output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also „standalone“, without any gas monitor. The Gas detector is also available with an incorporated display, or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...1'000/2'500 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 90: < 15 sec | **OPERATION TEMPERATURE:** -30 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

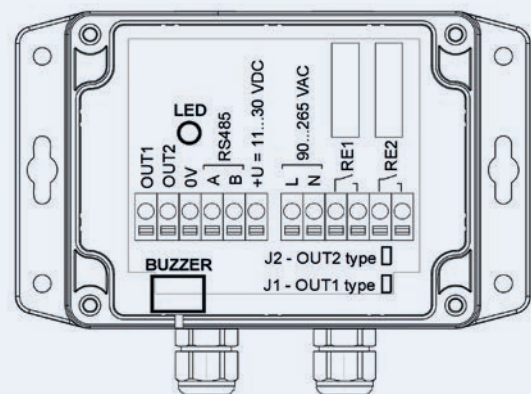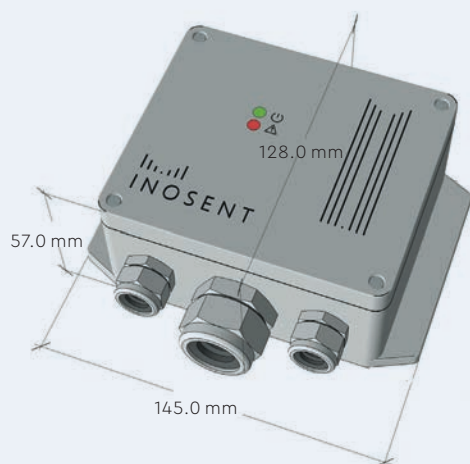

IP65



REFRIGERANT-DETECTOR I2608-HFC-S-RP33-LCD

The Gas detector is designed for the detection of (H)FKW's (R134a, R404a, etc) and provides 2 internal relay outputs for ventilation control and alarm, a 85dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue and digital output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also „standalone“, without any gas monitor. The Gas detector is also available in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm², shielded, 2x2x0,75 mm², shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...1'000/2'500 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 90: < 15 sec | **OPERATION TEMPERATURE:** 0 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1 % Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

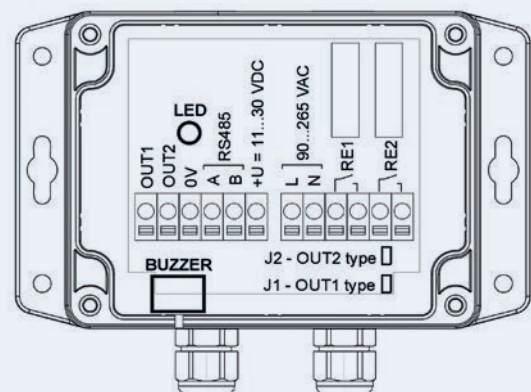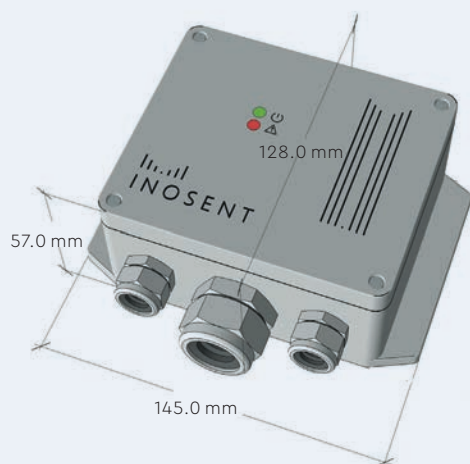

IP65



REFRIGERANT-DETECTOR I2608-HFC-S-RLCD

The Gas detector is designed for the detection of (H)FKW's (R134a, R404a, etc) and provides 2 internal relay outputs for ventilation control and alarm, a 85dB Alarm buzzer and an LED alarm indicator. The Gas detector provides analogue and digital output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also „standalone“, without any gas monitor. The Gas detector is also available with an incorporated display, a remote sensor probe or in a neutral IP20 enclosure for Indoor-Installation.





SPECIFICATIONS ELECTRONICS

SUPPLY: 11...30 VDC (optional 24 VAC or 90...265 VAC) | **POWER CONSUMPTION:** max. 60 mA
WIRING ANALOGUE/DIGITAL: 3x0,75 mm2, shielded, 2x2x0,75 mm2, shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0...10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 SPST (250 VAC/ 30 VDC, 5A max) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

SPECIFICATIONS SENSOR

MEASURING PRINCIPLE: Semiconductor | **MEASURING RANGE:** 0...1'000/2'500 ppm
ACCURACY: +/- 3 % of measuring range | **RESPONSE TIME:** t 90: < 15 sec | **OPERATION TEMPERATURE:** -30 °C ...+60 °C | **HUMIDITY:** 0...95 % (non condensing) | **SIGNAL DRIFT:** < 1% Signal/Month
APPROX. LIFETIME AT 20°C: > 10 years, depending on application | **CALIBRATION:** It is necessary to recalibrate the gas detector at least once a year.

DIMENSIONS AND ELECTRONICS

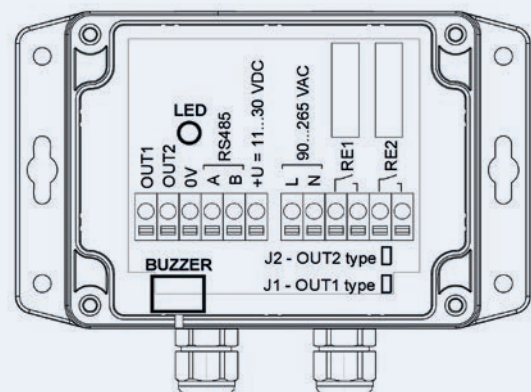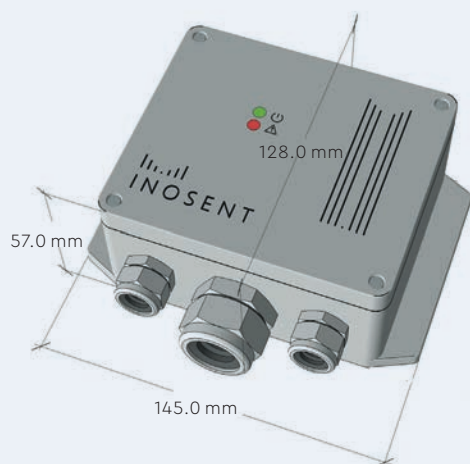

LED-WARNING SIGN WITH HORN TYPE I30 (BUS-COMPATIBLE)

The 30 cm long LED-Sign with bright red LED's may be used for most types of Gas Alarm. The LED-Sign can be used with a flashing or a continuous light and includes the option to pre-select text or pictograms in different colours, depending on the client's request. The supply voltage of the LED-Sign is 24VDC and it incorporates a 92dB Alarm horn, which can be controlled separately from the LED's.


The LED-Sign in combination with the INOSENT BUS-compatible 'Ultimate' or 'Compact' controller allows for independent programming of the LED's and sounder in different alarm modes. This design function facilitates a simple installation on the same BUS-Cable as the gas detectors, eliminating the need for additional cable. The LED-Sign is also available with 60 cm length one sided (standard) or double-sided.



LED-SIGN (ELECTRONICS)

SUPPLY VOLTAGE: 24 VDC | **POWER :** max. 2 W | **SUPPLY ANALOGUE (24V)/DIGITAL:** 2x 0,75 mm, 2x2x0,75 mm², shielded | **PROTECTION CLASS:** IP 52 | **VOLUME:** ca. 92 dB |
LIFETIME LEDS: 50'000 h | **WEIGHT:** 400 gr | **CERTIFICATIONS:** CE

DIMENSIONS AND CONNECTION

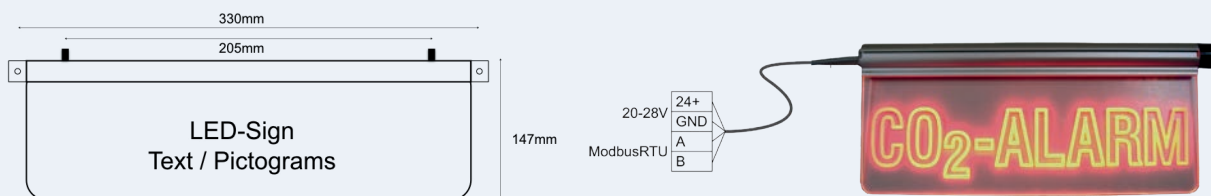

ALARM LIGHT WITH HORN TYPE I94-230


Horn with flashing light in current technology without mechanical wear parts. 2 different sound variants selectable by means of a toggle switch. Separate control of the light and the horn possible. Standard colour yellow.

SPECIFICATIONS


SUPPLY VOLTAGE: 230 VAC
POWER: max. 60mA
WIRING: 2x0,75 mm
PROTECTION CLASS: IP 66 (ABS-CASE)
VOLUME: 95 dB
SOUNDS: 2 sounds variants
LIGHTNING: 0,7Ws 1 Hz
OPERATING TEMPERATURE: -30...+60 °C
DIMENSIONS: height 85mm, diameter 62mm
WEIGHT: 78 gr
CERTIFICATIONS: CE



DIMENSIONS

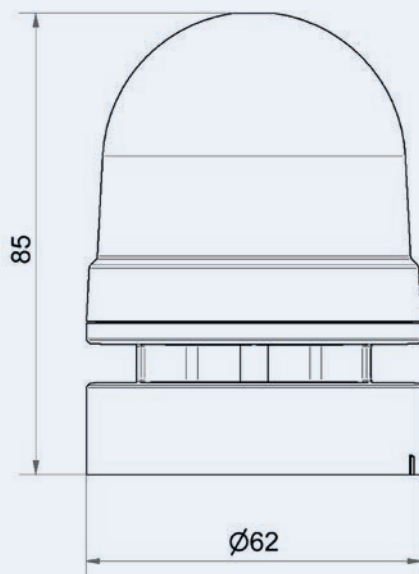

CONNECTIONS

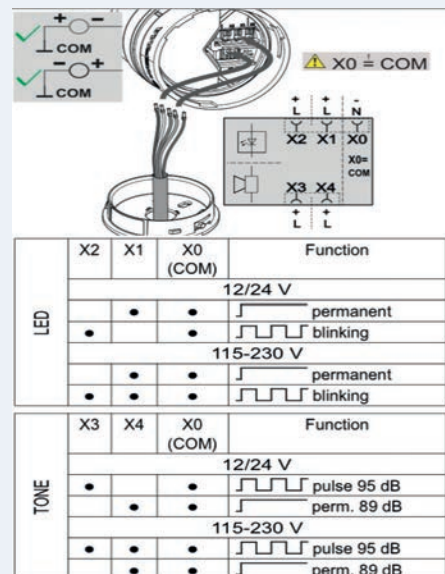


INOSENT MODBUS-CABLE 2 x 1 MM² / 2 x 0.75 MM² IMK 21275

The INOSENT Modbus-cable IMK 21275 was designed for our BUS system. The colored cores allow easy and correct connection of the components.

The shield and the paired wires protect our data cable from external influences. Our cable meets the fire protection class CPR B2ca and is halogen-free



CABLE TYP:	IMK 21275
OUTSIDE DIAMETER:	7.80 mm
OUTHER SHEATH:	violet, halogen-free, shielded
CORES:	twisted in pairs halogen free
POWER SUPPLY CROSS-SECTION:	2 x 1 mm ²
COLOURS POWER SUPPLY:	Brown = V- / White = V+
DATA CABLE CROSS-SECTION:	2 x 0.75 mm ²
SUPPLY COLOURS:	Green = A / Yellow = B
FIRE PROTECTION CLASS:	CPR B2ca

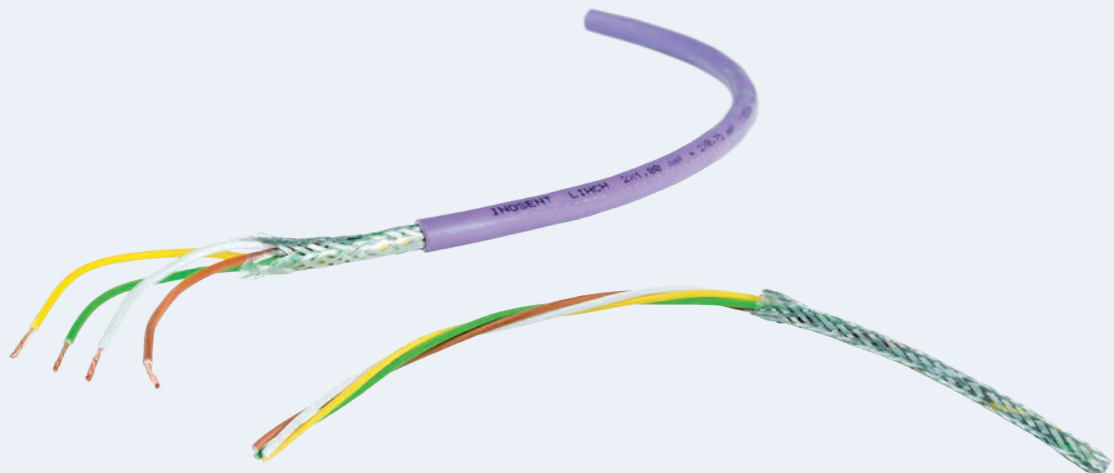

CONTACT

INOSENT IS THERE FOR YOU

Regardless of the reason for your interest in the area of gas detection technology: Contact us and we will do our best to find the optimum solution for you.

We will be happy to go into detail with you and address your specific ideas and concerns – because you can always depend on INOSENT.

INOSENT Gaswarntechnik AG

Eichwatt 5
CH-8105 Regensdorf / Switzerland

Telephone: +41 (0)44 556 83 00

Fax: +41 (0)44 556 83 01

E-Mail: info@inosent.ch